



RS240-PITCH 76.20 mm

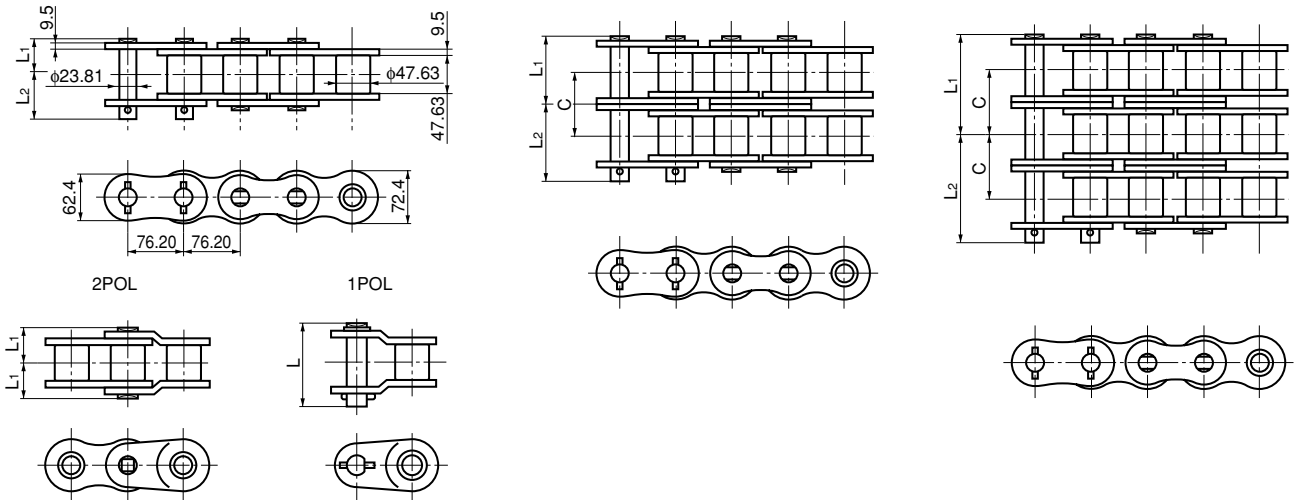

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin				Transverse Pitch C	Standard Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2	L							
RS 240	1	103.4	47.9	55.5	106.7	87.8	Riveted	550.4 (56,125)	686 (70,000)	99.0 (10,100)	24.5	40
RS 240-2	2	191.3	91.9	99.4	198.4		Riveted	1,100.8 (112,250)	1,370 (140,000)	168 (17,170)	48.1	
RS 240-3	3	279.0	135.85	143.15	286.3		Riveted	1,651.2 (168,376)	2,060 (210,000)	248 (25,250)	71.6	
RS 240-4	4	367.1	179.8	187.3	374.2		Riveted	2,001.6 (204,108)	2,750 (280,000)	327 (33,330)	95.1	
RS 240-5	5	455.0	223.75	231.25	462.0		Riveted	2,502.0 (255,135)	3,430 (350,000)	386 (39,390)	118.6	
RS 240-6	6	542.8	267.7	275.1	550.1		Riveted	3,002.4 (306,162)	4,120 (420,000)	456 (46,460)	142.1	

RF320T-PITCH 101.60 mm

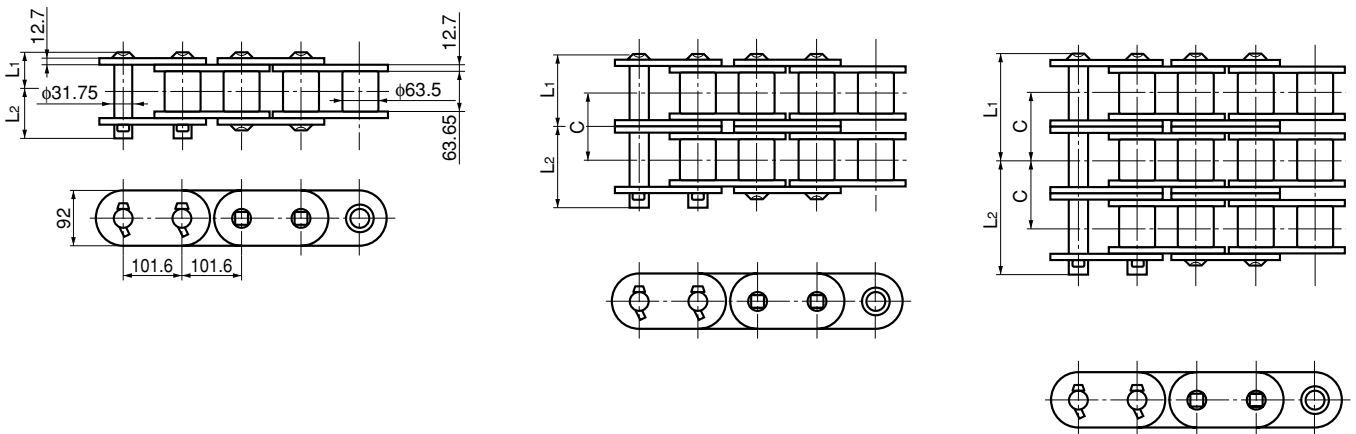

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin			Transverse Pitch C	Standard Type of Pin	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2						
RF320T	1	141.4	63.8	77.6	117.1	Riveted	1,150 (117,000)	123 (12,500)	47.6	30
RF320T-2	2	258.7	122.4	136.3		Riveted	2,290 (234,000)	208 (21,250)	94.6	
RF320T-3	3	375.9	181.05	194.87		Riveted	3,440 (351,000)	306 (31,250)	141.5	
RF320T-4	4	493.2	239.65	253.55		Riveted	4,590 (468,000)	405 (41,250)	188.5	

Note: Offset links are not available.