


RS25 - BF25H-PITCH 6.35 mm

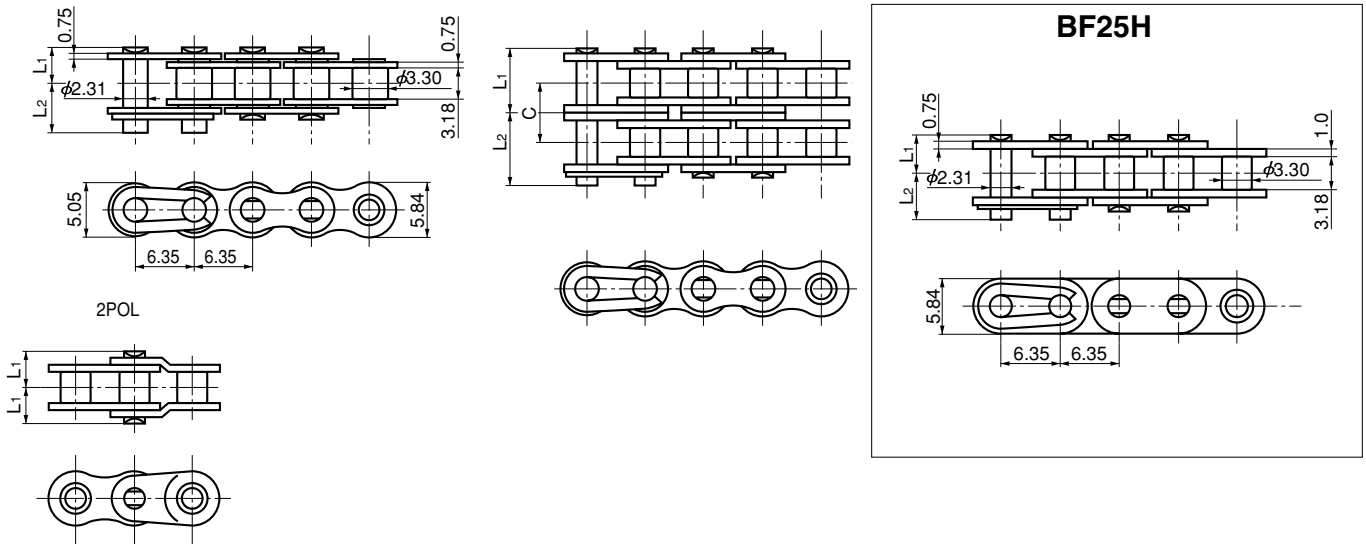


(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin			Transverse Pitch C	Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2							
RS 25	1	8.6	3.8	4.8	—	Riveted	3.6 (367)	4.71 (480)	0.64 (65)	0.14	480
RS 25-2	2	15.0	7.0	8.0	6.4	Riveted	7.2 (734)	9.41 (960)	1.08 (110)	0.27	480
RS 25-3	3	21.4	10.2	11.2	6.4	Riveted	10.8 (1,101)	14.1 (1,440)	1.57 (160)	0.42	480
BF 25H	1	9.2	4.1	5.1	—	Riveted	—	5.88 (600)	0.78 (80)	0.17	480

Note : Only two-pitch offset links are available for RS25 and RS25-2. No offset links are available for BF25H.

RS35-PITCH 9.525 mm

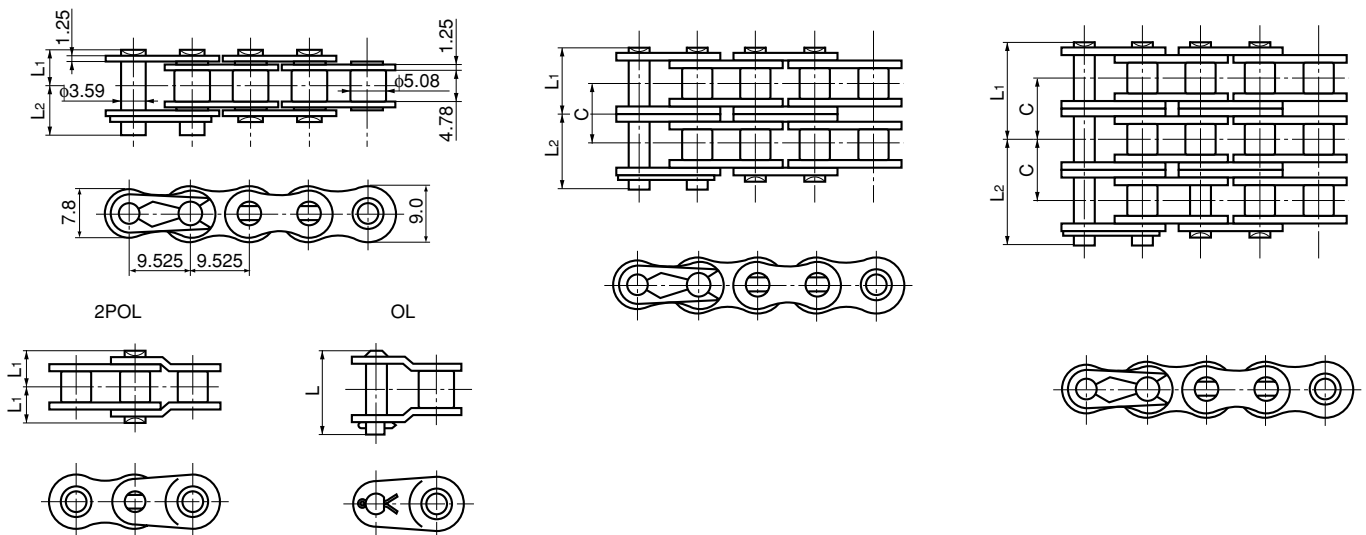

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin				Transverse Pitch C	Standard Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2	L							
RS 35	1	12.7	5.85	6.85	13.5	10.1	Riveted	8.7 (887)	11.3 (1,150)	2.16 (220)	0.33	320
RS 35-2	2	22.8	10.9	11.9	24.5		Riveted	17.4 (1,774)	22.6 (2,300)	3.63 (370)	0.69	
RS 35-3	3	32.9	16.0	16.9	34.6		Riveted	26.1 (2,661)	33.8 (3,450)	5.39 (550)	1.05	

CHAIN