


RF400T-PITCH 127.0 mm

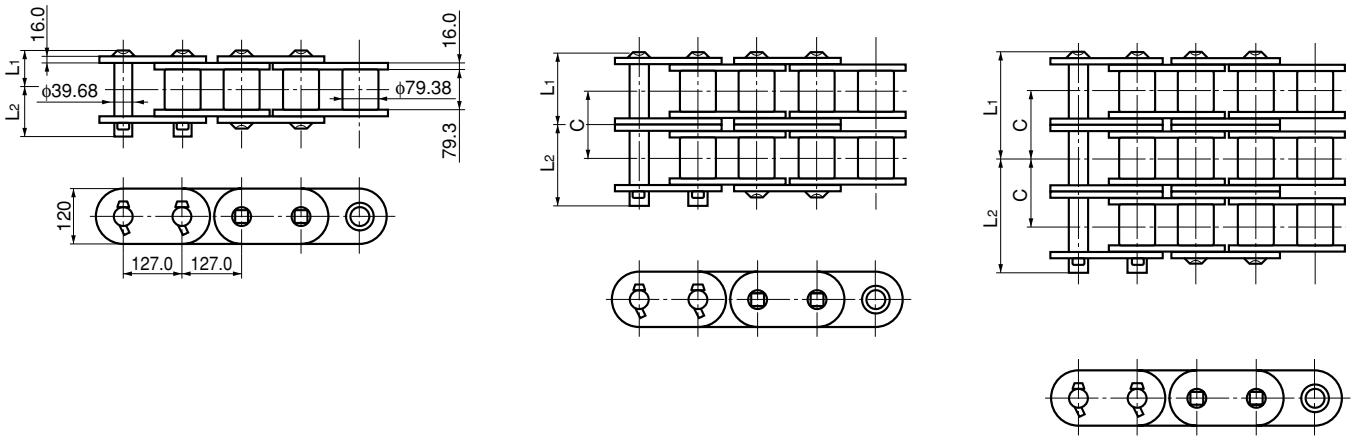

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin			Transverse Pitch C	Standard Type of Pin	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L ₁ + L ₂	L ₁	L ₂						
RF400T	1	172.3	79.65	92.65	146.8	Riveted	1,950 (199,000)	188 (19,200)	83.9	24
RF400T-2	2	319.0	153.05	165.95		Riveted	3,900 (398,000)	320 (32,640)	166.8	
RF400T-3	3	465.7	226.45	239.25		Riveted	5,850 (597,000)	471 (48,000)	249.7	
RF400T-4	4	612.3	299.8	312.5		Riveted	7,810 (796,000)	621 (63,360)	332.7	

Note: Offset links are not available.