



RS60-PITCH 19.05 mm

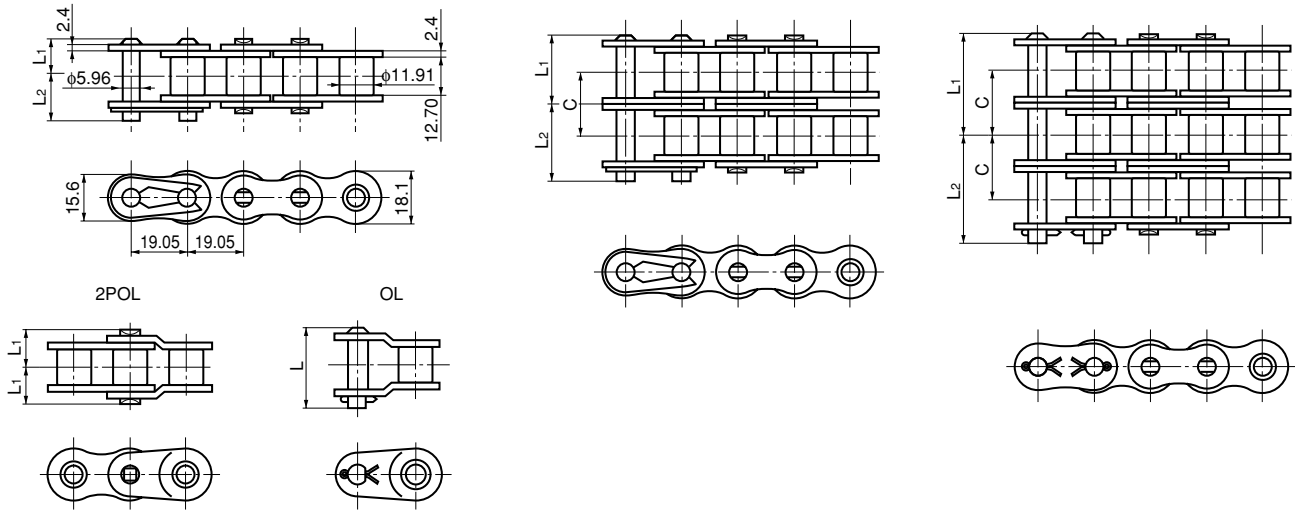

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin				Transverse Pitch C	Standard Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2	L							
RS 60	1	27.6	12.85	14.75	28.2	22.8	Riveted	34.2 (3,487)	44.1 (4,500)	8.83 (900)	1.53	160
RS 60-2	2	50.5	24.25	26.25	52.6		Riveted	68.4 (6,975)	88.3 (9,000)	15.0 (1,530)	3.04	
RS 60-3	3	73.8	35.65	38.15	75.5		Riveted	102.6 (10,462)	132 (13,500)	22.1 (2,250)	4.54	
RS 60-4	4	96.6	47.05	49.55	98.3		Riveted	124.4 (12,688)	177 (18,000)	29.1 (2,970)	6.04	
RS 60-5	5	119.5	58.5	61.0	121.2		Riveted	155.5 (15,860)	221 (22,500)	34.4 (3,510)	7.54	
RS 60-6	6	142.4	69.9	72.5	144.0		Riveted	186.6 (19,032)	265 (27,000)	40.6 (4,140)	9.05	

RS80-PITCH 25.40 mm

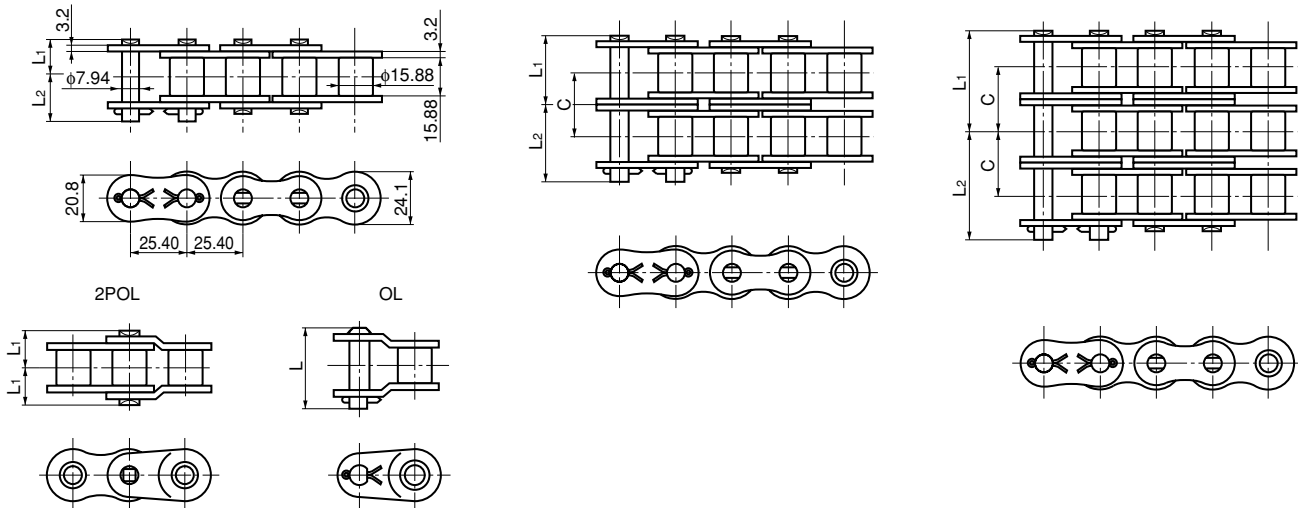

(Dimensions in mm)

TSUBAKI Chain No.	Number of Strands	Pin				Transverse Pitch C	Standard Type of Pin	Min. Ultimate Strength ANSI Standard kN(kgf)	Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m	No. of Links/Unit
		L1 + L2	L1	L2	L							
RS 80	1	35.5	16.25	19.25	36.0	29.3	Riveted	61.2 (6,241)	78.5 (8,000)	14.7 (1,500)	2.66	120
RS 80-2	2	64.8	30.9	33.9	67.5		Riveted	122.4 (12,481)	157 (16,000)	25.0 (2,550)	5.27	
RS 80-3	3	94.1	45.6	48.5	96.9		Riveted	183.6 (18,722)	235 (24,000)	36.8 (3,750)	7.89	
RS 80-4	4	123.5	60.25	63.25	126.3		Riveted	222.4 (22,680)	314 (32,000)	48.5 (4,950)	10.50	
RS 80-5	5	152.9	74.95	77.95	155.6		Riveted	278.0 (28,350)	392 (40,000)	57.4 (5,850)	13.11	
RS 80-6	6	182.1	89.6	92.5	184.9		Riveted	333.6 (34,020)	471 (48,000)	67.7 (6,900)	15.73	