


ULTRA SUPER SERIES

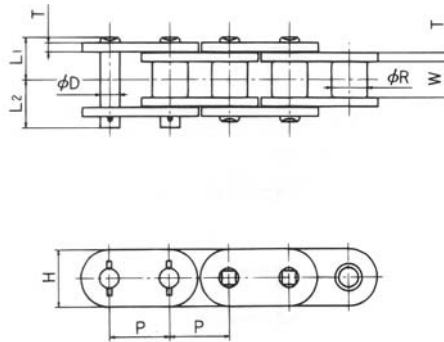

(Dimensions in mm)

TSUBAKI Chain No.	Pitch p	Roller Diam. R	Width b/w Roller Link Plates W	Side Plates		Pins			Ave. Tensile Strength kN(kgf)	Max. Allowable Load kN(kgf)	Approx. Mass kg/m
				T	H	D	L1	L2			
US100	31.75	19.05	19.05	4.8	30.1	10.32	22.35	25.35	172 (17,500)	39.2 (4,000)	5.07
US120	38.10	22.23	25.40	5.6	36.2	12.28	27.55	31.55	245 (25,000)	53.9 (5,500)	7.22
US140	44.45	25.40	25.40	6.4	42.2	13.97	29.50	34.20	314 (32,000)	63.7 (6,500)	9.24
US160	50.80	28.58	31.75	7.1	48.2	15.62	34.50	40.20	392 (40,000)	85.3 (8,700)	12.19
US200	63.50	39.68	38.10	9.5	60.3	20.41	42.95	50.95	667 (68,000)	108 (11,000)	20.47
US240	76.20	47.63	47.63	12.7	72.4	24.73	54.80	64.90	981 (100,000)	151 (15,400)	31.69

- Notes:**
1. RS Standard Sprockets can be used if the sprocket teeth have been hardened and the sprocket is not a cast iron type.
 2. Chain should be lubricated using: a) drip method b) oil bath c) lubrication pump
 3. Offset links are not available.
 4. Riveted type chain will be supplied unless otherwise specified.
 5. Chain must be used under 50 m/min speed.
 6. Multi-strand chains are not available.